

# Versa-Liner® Installation Instructions

For Versa-Liner® Part Numbers V160F7, V19580, V19582, V195F9M, V195F96M, V170F5, V195F6M, V195F66M, V22569, V22501, & V22587

## IMPORTANT

Please Read and Save These Instructions. Do Not Loosen or Remove Lug Nuts

**Note:** Set the vehicle parking brake prior to wheel product installation.

The Versa-Liner® kit you received should contain the following items:

### INCLUDES:

2-Front Versa-Liners	1-Installation Tool
2-Rear Versa Liners	4-Emblems
8-Lug Nut Covers w/ Enclosed Steel Jam Nuts	1-Instruction Sheet


### NOTE:

This system can be installed with the installation tool supplied.

This tool should be stowed with your vehicle tire tool.

No other tools are necessary.

Do not use power tools for installation.




## Front Wheel Versa-Liner® Instructions


Align the valve stem cut out in the front Versa-Liner® with the valve stem on the wheel.

Secure with two enclosed steel jam nuts. Securely tighten each jam nut with the installation tool provided

1

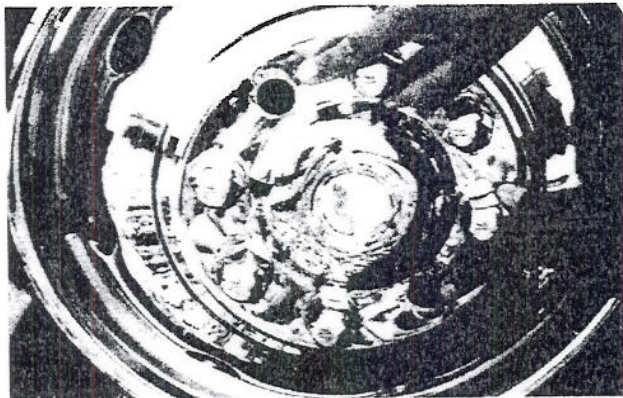

2

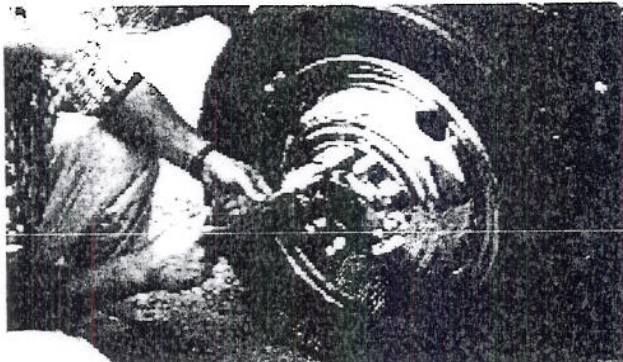


(over)



**For Versa-Liner® Part Numbers V160F7, V19580, V19582, V195F9M, V195F96M, V170F5, V195F6M, V195F66M, V22569, V22501, & V22587**

**3**

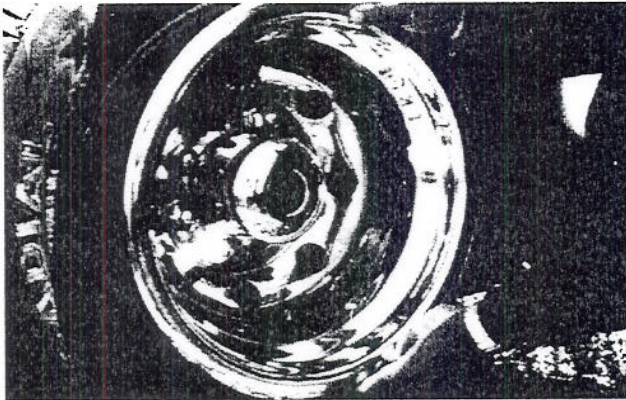

## **Rear Wheel Versa-Liner® Instructions**

Align the openings in the rear Versa-Liner® with the openings in the wheel.

**4**



Mount the rear Versa-Liner® using two lug-nut covers with enclosed steel jam nut and the installation tool provided.\*

\*Note: Check for tightness after the first 50 to 100 miles of operation. Recheck periodically.

### **Care and Maintenance**

- Clean only with mild soap and water.
- Do not use harsh detergents, acids or abrasives.
- Periodically check jam nuts for tightness.